

Quality Analysis of Spot Color Reproduction with an Inkjet Printer

Yu-Ju Wu, Miro Suchy, Paul D. Fleming III and Alexandra Pekarovicova; Center for Ink and Printability Research, Department of Paper Engineering, Chemical Engineering and Imaging, Western Michigan University, Kalamazoo, MI, USA

Abstract

Spot color is widely used in commercial, product or packaging printing to obtain a colorful appearance. With the combination of the right software, inks and media, an inkjet printer can be treated as a digital proofer for spot color printing, providing significant time and cost savings compared to conventional procedures for jobs approval. An Epson Stylus Pro 4000 digital printer combined with two commercially available RIPs were tested and compared. ICC profiles were generated for the Epson Stylus Pro 4000 printer, using the actual production printing substrate and manufacturer recommended proofing paper. Color gamuts of different output combinations were compared and the quality of spot color reproduction was evaluated in terms of the ΔE in $L^*a^*b^*$ color space for selected spot colors.

Introduction

Recently, the trend in the printing industry includes shorter run lengths and work with fast turnaround times. New developments in digital printing have made it possible to produce small quantities of high-quality color products at affordable prices. With its unique properties, digital printing can be used for proofing, providing significant time and cost savings compared to conventional procedures (preparing cylinders and printing proof samples) for potential product verification [1, 2].

The implementation of digital proofing is highly integrated with color management [3]. The key to achieving the best quality color reproduction is to combine the right equipment, software and media.

The use of raster imaging processor (RIP) has provided better control for accurate digital color reproduction in inkjet printing. The ink can be adjusted and limited in the RIP, achieving the right amount of ink distribution correctly on the media. Because ink is distributed correctly on the media, a larger color gamut can be obtained [4, 5].

Paper is a significant variable in predicting and reproducing color. The interaction between paper and ink, its porosity, roughness, coating structure, together with paper properties such as whiteness, light scattering, and gloss [6, 7] must be considered in the digital proofing process. The gamut of the printer can be significantly affected by the properties of the substrate used for printing [8, 9]. Proofing on the actual production stock more closely predicts print outcome. However, working with different inks and devices, the actual production printing substrate can have a very different color gamut and behave differently in the digital proofing process. Therefore, optimal digital proofing must factor the paper into the color reproduction process [10-12].

The main purposes of this experimental study are to (1) examine the quality of spot color reproduction with an inkjet printer, and (2) establish a digital proofing system for spot color printing. An Epson Stylus Pro 4000 digital printer combined with CGS ORIS RIP and GMG ColorProof RIP were tested and compared. ICC profiles were generated for the Epson Stylus Pro 4000 printer, using the actual production printing substrate and the manufacturer recommended proofing paper. Color gamuts and $L^*a^*b^*$ values of different print combinations were compared.

Experimental

The objective of this investigation was to establish a digital proofing system for spot color printing. Color management with ICC profiles was used to investigate the reproduction of specific spot colors. The digital printer, an Epson Stylus Pro 4000 combined with commercially available RIPs - GMG ColorProof RIP and CGS ORIS RIP, was tested for different printing substrates.

Seven spot colors were selected for evaluation: Blue-347, Black-392, Red-314 and Red-349, and Yellow-355, Yellow-357, and Yellow-385. Each chart consisted of 66 patches of different gray levels, generating a chart with a variety of shades for the color (as shown in Figure 1). The colors were printed on the substrate by a drum cylinder gravure proofing press. Each specific measured area on the individual chart was measured for $L^*a^*b^*$ values five times to reduce the measuring error and the average value was computed as original data. According to these original data, the spot color test charts in digital form were generated by using Photoshop CS2, so that these charts could be used for actual digital printing reproduction.

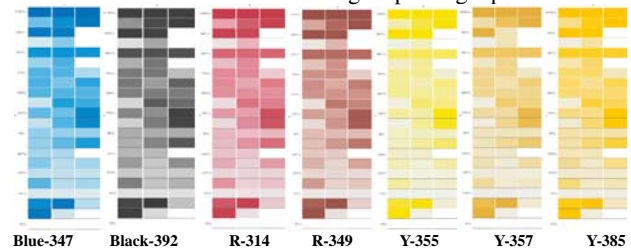


Figure 1. Spot Color Test Chart

ICC profiles were generated for the Epson Stylus Pro 4000, using selected printing substrates (the actual production printing substrate and manufacturer recommended proofing paper). The device was profiled as a CMYK device. For the GMG ColorProof RIP and CGS ORIS RIP, the ECI2002V CMYK chart was printed on the tested substrates without any ink limitation, because a specific full gamut color profile was needed to reproduce the desired spot colors. Those printed charts were then measured with a GretagMacbeth SpectroScanT in reflection mode, operated by GretagMacbeth Measure Tool 5.0.4 software. The measurement files were used to generate profiles using GretagMacbeth ProfileMaker Pro 5.0.4. ICC profiles were loaded into the RIPs' spot color functions. Seven spot color test charts were then printed via the RIPs on the tested substrates and the $L^*a^*b^*$ values for each color patch of the chart were measured using the GretagMacbeth SpectroScanT.

The quality of spot color reproduction was evaluated in terms of the ΔE in $L^*a^*b^*$ color space. The Epson 4000 printer with GMG ColorProof RIP was employed to print spot color chart on different printing substrates and the color gamuts of the output combination were compared using ColorThink 3.0 Pro software.

Results and Discussion

In this study, Epson Stylus Pro 4000 printer was profiled using CGS ORIS RIP and GMG Color Proof RIP on the actual production

printing substrate and the manufacturer recommended proofing paper. Selected spot color test charts were then printed via CGS ORIS RIP and GMG ColorProof RIP. The color gamuts of four output combinations were tested and compared. The quality of spot color reproduction was evaluated in terms of the color difference (ΔE).

Gamut Comparison

Figure 2 illustrates color gamut comparison for GMG RIP and ORIS RIP on the actual production printing substrate (with $L^*a^*b^*$ values of original data for reference). GMG Color Proof RIP demonstrated larger gamut of Epson Stylus Pro 4000 Printer on the actual gravure printing substrate, especially in yellow, red, and magenta area. The gamut volume for GMG Color Proof RIP and CGS ORIS RIP are 227,700 and 193,900, respectively. It is important to note that some shadow tints in spot color test charts are out of color gamut of printers.

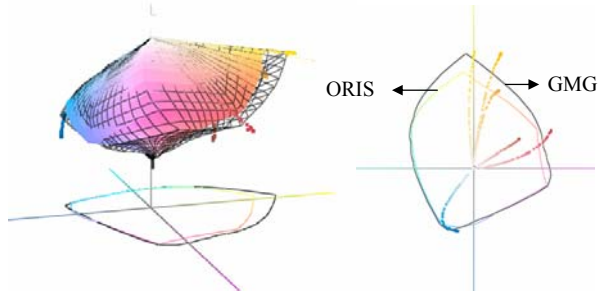


Figure 2. Epson 4000 gamut comparison on the actual production printing substrate: GMG (wireframe) vs. ORIS (true color).

Figure 3 depicts color gamut comparison for GMG RIP and ORIS RIP on the manufacturer recommended proofing paper. The color gamut of GMG Color Proof RIP is similar to that of CGS ORIS RIP, with exception of yellow and blue area. The gamut volumes are 630,500 for GMG Color Proof RIP and 630,800 for CGS ORIS RIP. Obviously, the color gamut of manufacturer recommended proofing paper is larger than that of actual production printing substrate in terms of gamut volume.

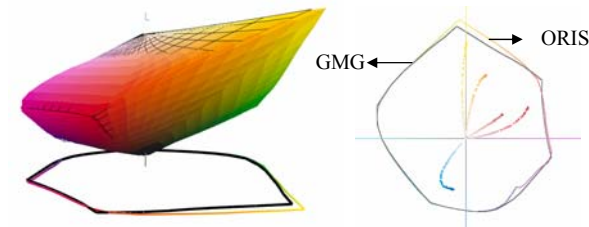


Figure 3. Epson 4000 gamut comparison on the manufacturer recommended proofing paper: GMG (wireframe) vs. ORIS (true color).

ΔE comparison of original and printed $L^*a^*b^*$ values for Spot Color Test Charts

The ΔE values calculated for original and actual printed $L^*a^*b^*$ values for each spot color are shown in Table 1. The first ΔE value indicates the average ΔE value for each spot color chart. The second ΔE value is the minimum ΔE value, while the third value shows the maximum ΔE value among 66 patches for each spot color. For actual production printing substrate, both commercially available RIPs provide good color reproduction for the selected spot colors except for the Yellow-385 spot color (the average ΔE values of selected spot colors are all lower than 3 with exception of Yellow-385 color). For manufacturer recommended proofing paper, the GMG ColorProof RIP offers better color

reproduction for Blue-347, Black-392, Red-314, and Red-349 spot colors, whereas CGS ORIS RIP has better spot color reproduction in yellow spot colors.

Table 1. Summary of ΔE comparison for different print combinations

Spot colors	ΔE on actual production printing substrate		ΔE on manufacturer recommended proofing paper	
	GMG RIP	ORIS RIP	GMG RIP	ORIS RIP
Blue-347	1.4, 0.1, 8.3	2.4, 0.1, 9.9	0.6, 0.1, 2.0	2.6, 0.3, 4.3
Black-392	1.5, 0.2, 6.9	2.6, 0.2, 10.6	0.6, 0.2, 1.7	1.7, 0.3, 4.9
Red-314	1.5, 0.3, 7.8	2.3, 0.0, 9.9	0.9, 0.1, 2.9	1.3, 0.4, 3.2
Red-349	1.1, 0.1, 4.9	1.4, 0.2, 4.8	1.0, 0.1, 5.6	1.9, 0.1, 6.2
Yellow-355	1.4, 0.1, 5.3	1.1, 0.2, 2.7	1.6, 0.6, 2.5	1.0, 0.2, 2.4
Yellow-357	1.1, 0.1, 2.2	1.0, 0.2, 2.1	0.9, 0.1, 1.4	1.0, 0.3, 2.0
Yellow-385	4.5, 0.2, 16.4	4.1, 0.0, 12.4	3.4, 0.4, 6.4	3.1, 0.2, 6.1

Figures 4 to Figures 10 present ΔE comparisons of original and printed $L^*a^*b^*$ values for selected spot color charts. The dashed-line represents the reference of 4 ΔE , where 2-5 ΔE stands for minute color differences in high-quality imaging systems. For the Blue-347 spot color test chart, the ΔE values of the actual production printing substrate with GMG RIP (black thick-line) and ORIS RIP (black thin-line) are lower than 4 except for the shadow area. The manufacturer recommended proofing paper with the GMG RIP combination (gray thick-line) has good reproduction capabilities in selected spot colors in terms of lower ΔE values. Conversely, the manufacturer recommended proofing paper with the ORIS RIP combination (gray thin-line) yields higher ΔE values compared to other print combinations.

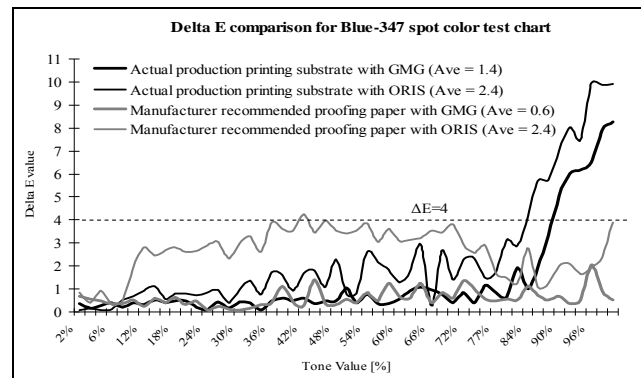


Figure 4. ΔE comparison of original and printed $L^*a^*b^*$ values for Blue-347 color.

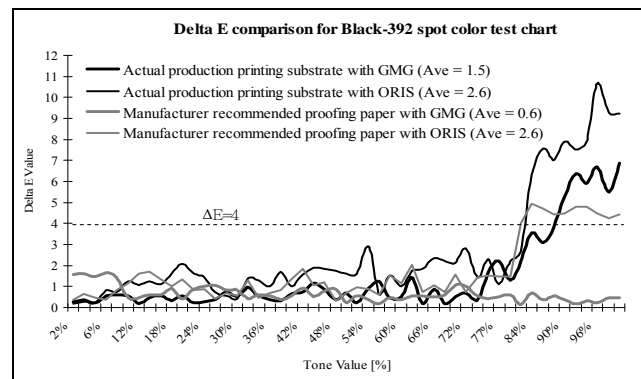


Figure 5. ΔE comparison of original and printed $L^*a^*b^*$ values for Black-392 color.

As shown in **Figures 5 to 7**, printing via either GMG RIP or ORIS RIP, the actual production printing substrate tends to have larger ΔE values for black and red spot color in shadow areas. The manufacturer recommended proofing paper printing via GMG RIP (gray thick-line) and ORIS RIP (gray thin-line) has better reproduction capability in the black and red spot colors in terms of lower ΔE values. For Yellow-355 and Yellow-357 charts (as shown in **Figure 8** and **Figure 9**), four print combinations have better reproduction capability in Yellow-355 and Yellow-357 spot colors in terms of lower ΔE values. The ΔE values of five printer combinations are controlled in the range of 0-4. The Yellow-385 spot color chart, compared to other spot color charts, has relatively high ΔE values.

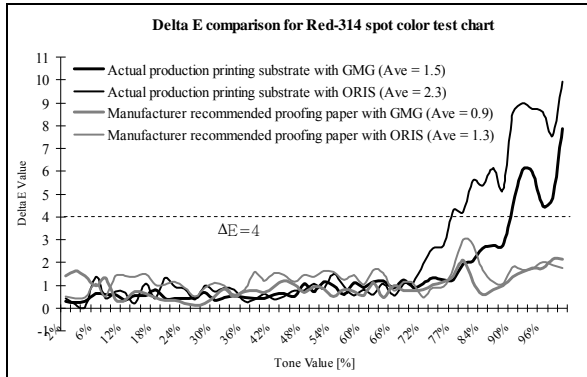


Figure 6. ΔE comparison of original and printed $L^*a^*b^*$ values for Red-314 color.

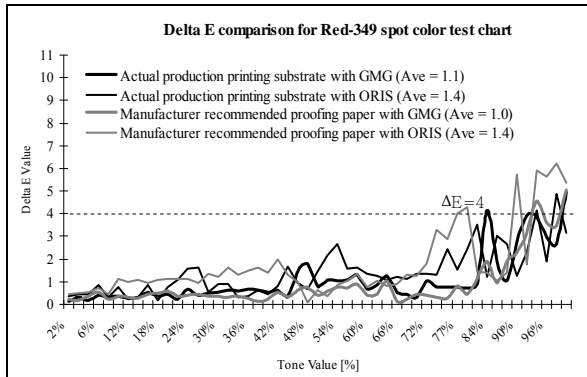


Figure 7. ΔE comparison of original and printed $L^*a^*b^*$ values for Red-349 color.

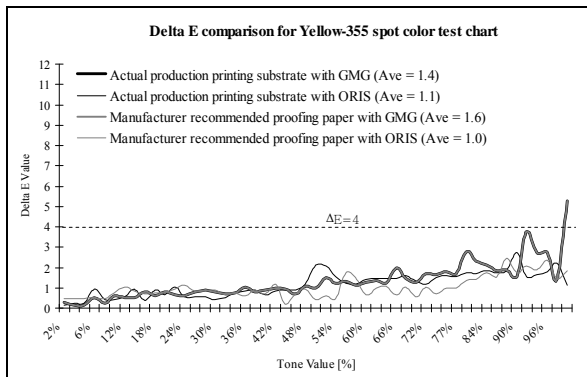


Figure 8. ΔE comparison of original and printed $L^*a^*b^*$ values for Yellow-355 color.

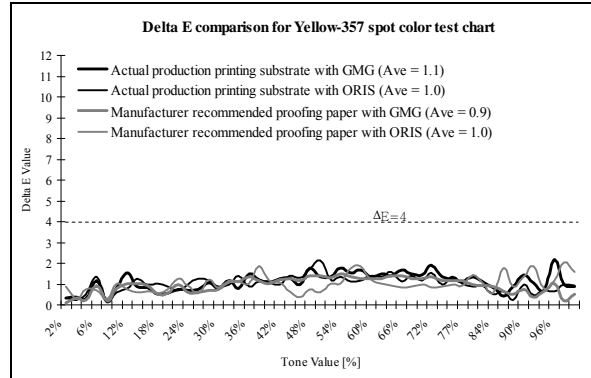


Figure 9. ΔE comparison of original and printed $L^*a^*b^*$ values for Yellow-357 color.

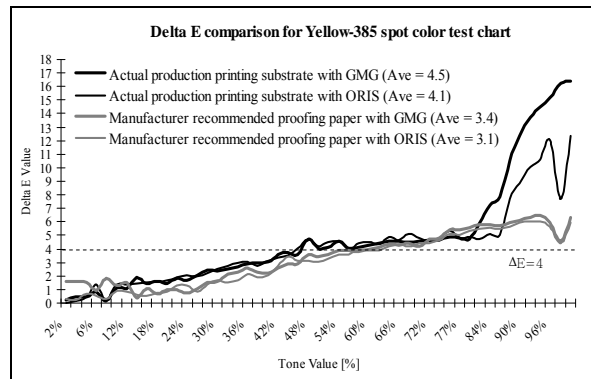


Figure 10. ΔE comparison of original and printed $L^*a^*b^*$ values for Yellow-385 color.

As shown in **Figures 4** to **Figures 10**, the ΔE values increase significantly in highly saturated areas for some selected spot colors. **Table 2** presents ΔL^* and ΔE_{ab}^* comparison for different print combinations in shadow areas (80%-100% tints). The Lightness/darkness differences (ΔL^*) were calculated for each color in the test chart and each printing device. The chroma difference (ΔE_{ab}^*) calculation helps to establish how close each device is able to create the desired color hue. In this study, for Blue-347 and Black-392 spot colors, ΔL^* contributes more to ΔE than ΔE_{ab}^* . For Red and Yellow spot colors, ΔE_{ab}^* contributes more to ΔE^* than ΔL^* .

Conclusions

For color gamut comparison, either printing via GMG ColorProof RIP or CGS ORIS RIP, the color gamut of manufacturer recommended proofing paper is significantly larger than that of the actual production printing substrate. The actual production printing substrate printing via the GMG RIP results in better spot color reproductions for Blue-347, Black-392, Red-314, and Red-349 spot colors, whereas CGS ORIS RIP has better spot color reproduction in Yellow spot colors. For manufacturer recommended proofing paper, GMG ColorProof RIP and CGS ORIS RIP provide better color reproduction for all selected spot colors except for Yellow-385 spot color.

Among the seven selected spot colors, Yellow-385 spot color is the hardest one to reproduce, due to some spot colors in the test charts that are out of color gamut of the test printer. Blue-347 and Black-392 spot colors have higher ΔL^* values, which contribute more to ΔE than ΔE_{ab}^* . As for Red and Yellow spot colors, the

chroma difference (ΔE_{ab}^*) is higher than ΔL^* , contributing more to ΔE .

Overall, either the selected substrates printing via GMG ColorProof RIP or CGS ORIS RIP result in better spot color reproduction in highlight and mid-tone areas. However, they have poor color reproduction in highly saturated colors. It also found that the actual production printing substrate cannot accept such large amounts of ink in solid areas for blue and black color and causes ink smearing. Effort must be taken to improve the color reproduction of shadow areas. Users can proof spot colors on the manufacturer recommended proofing paper printing via GMG ColorProof RIP or CGS ORIS RIP if good color-matching is considered crucial. The color match is better with RIPs than with Photoshop with printer drivers [13].

Table 2. ΔL^* and ΔE_{ab}^* comparison for different print combinations in shadow areas (80%-100%)

Spot colors / Tint [%]	Actual production printing substrate				Manufacturer recommended proofing paper				
	GMG RIP		ORIS RIP		GMG RIP		ORIS RIP		
	ΔL^*	ΔE_{ab}^*	ΔL^*	ΔE_{ab}^*	ΔL^*	ΔE_{ab}^*	ΔL^*	ΔE_{ab}^*	
Blue-347	80	0.1	0.6	0.7	3.1	0.5	0.2	0.3	1.4
	84	1.0	0.3	2.6	3.3	0.7	0.9	0.6	2.7
	88	3.2	0.9	4.6	3.4	0.4	0.3	0.2	1.2
	92	5.5	2.5	7.8	2.8	0.2	0.3	0.7	2.0
	96	5.9	2.7	8.4	2.3	1.3	1.6	1.0	1.7
100	7.8	2.8	9.0	4.1	0.3	0.4	0.1	3.9	
Black-392	80	1.1	0.7	2.2	0.5	0.3	0.1	1.5	0.1
	84	2.8	2.2	6.2	1.3	0.4	2.8	4.1	2.8
	88	2.4	3.0	6.9	1.4	0.5	2.1	3.9	2.1
	92	5.3	3.5	7.3	1.8	0.0	2.1	4.3	2.1
	96	5.8	3.4	10.6	1.2	0.0	3.0	3.4	3.0
100	5.7	3.8	9.1	1.4	0.4	2.2	3.8	2.2	
Red-314	80	1.4	1.2	0.4	4.2	0.5	0.7	2.9	0.7
	84	0.9	2.5	0.2	5.3	0.3	0.2	1.7	0.2
	88	0.7	2.7	0.3	5.2	0.5	0.4	1.0	0.4
	92	0.6	6.0	0.3	9.0	0.1	0.8	1.5	0.8
	96	0.4	4.5	1.0	8.5	0.2	1.0	1.7	1.0
100	2.0	7.6	0.5	9.9	0.1	0.8	1.5	0.8	
Red-349	80	0.3	0.7	1.3	2.0	0.1	0.4	0.7	4.2
	84	2.1	3.6	0.9	0.8	1.2	1.5	0.7	1.2
	88	0.1	1.0	0.8	2.5	1.3	1.4	0.5	1.3
	92	3.3	2.1	2.2	0.7	2.4	2.1	1.6	0.9
	96	1.8	2.3	1.5	1.2	3.1	1.9	2.6	5.0
100	4.2	2.6	2.0	2.5	4.1	3.0	2.8	4.5	
Yellow-355	80	1.0	2.4	1.7	0.5	1.0	2.4	0.7	1.1
	84	1.7	1.2	1.2	1.5	1.7	1.2	1.1	1.4
	88	1.3	1.4	1.3	1.3	1.3	1.4	1.2	2.1
	92	0.1	3.8	0.6	1.4	0.1	3.8	1.5	1.4
	96	1.2	2.5	1.2	1.3	1.2	2.5	1.9	1.3
100	0.6	5.2	0.9	0.7	0.6	5.2	1.8	0.5	
Yellow-357	80	0.4	1.3	0.6	0.6	0.5	0.8	0.1	1.4
	84	0.1	0.8	0.2	0.5	0.1	0.9	0.4	0.4
	88	0.1	0.9	0.1	0.2	0.4	0.2	0.6	0.6
	92	0.4	1.0	0.3	0.3	0.1	0.4	0.8	1.7
	96	0.5	2.1	0.3	0.6	0.2	1.0	0.8	0.8
100	0.2	0.8	0.4	0.8	0.2	0.4	1.2	1.0	
Yellow-385	80	4.1	2.4	3.6	3.3	4.4	3.4	4.3	3.2
	84	3.2	6.5	3.7	3.5	5.0	3.0	4.6	3.2
	88	2.0	10.3	2.5	7.2	5.2	2.8	5.1	2.4
	92	1.7	13.6	3.0	9.6	5.8	2.6	5.3	2.9
	96	0.8	15.1	2.5	11.7	5.5	2.4	4.6	3.3
100	1.0	16.3	3.0	12.0	5.7	2.7	5.1	3.1	

Acknowledgement

The authors thank Omnova Solutions, Inc., and National Science Foundation grant MRI- 0215356 for partial support for this work, and GMG America and CGS Publishing Technologies for software donations.

References

- [1] M. Suchy, P. D. Fleming, and A. Sharma, "Spot Color Reproduction with Digital Printing", Proceedings of the IS&T NIP21: International Conference on Digital Printing Technologies, Baltimore, Maryland, pp. 93-97, (2005).
- [2] E. Hrehorova, A. Pekarovicova, P. D. Fleming, "Spot Color Consistency for Product Gravure", Proceedings of the 57th TAGA Annual Technical Conference, Toronto, Ontario, (2005).
- [3] A. Sharma, Understanding Color Management, Thomson Delmar Learning, NY, 1st Ed. (2004).
- [4] E. Hrehorova, A. Sharma, P. D. Fleming, "Color Reproduction Studies in RGB and CMYK Workflows using Inkjet Printer Drivers and RIPs", Proceedings of the 58th TAGA Annual Technical Conference, Vancouver, British Columbia, (2006).
- [5] J. Rich, "The RIP Report-Using and Choosing ICC-Based RIPs that Drive Inkjet Color Printers". Gaithersburg, MD: Rich & Association LLC. (2004).
- [6] H. K. Lee, M. K. Joyce, and P. D. Fleming, Influence of Pigment Particles on Gloss and Printability for Inkjet Paper Coatings. Proceedings of the IS&T NIP20: International Conference on Digital Printing Technologies, Salt Lake City, pp. 934-939. (2004).
- [7] H. K. Lee, M. K. Joyce, and P. D. Fleming, Influence of Pigment Particle Size and Pigment Ratio on Printability of Glossy Inkjet Paper Coatings. Journal of Imaging Science and Technology, 49, 1, pp. 54-61. (2005).
- [8] V. Lovell, et al., "New in the Pressroom: Color Management – The Coating Formulator's New Opportunity", Panel Discussion at TAPPI 06 Coating and Graphic Arts Conference, Atlanta, (2006).
- [9] V. Chovancova-Lovell and P. D. Fleming III, "Color Gamut – New Tool in Pressroom?", submitted to TAPPI Journal, (2006).
- [10] T. Wales, "Paper - A Forgotten Variable in the Color Management Process". GATFWorld, 16, 6, pp. 24-26. (2004).
- [11] O. Norberg, and M. Andersson, "The influence of paper properties on color reproduction and color management", Proceedings of the IS&T NIP19: International Conference on Digital Printing Technologies, New Orleans, pp. 836-840. (2003).
- [12] S. Bandyopadhyay, "Effect of paper properties on print quality of ink jet printer", Proceedings of the IS&T NIP17: International Conference on Digital Printing Technologies, Fort Lauderdale, pp. 141-143. (2001).
- [13] Y. J. Wu, M. Suchy, P. D. Fleming, and A. Pekarovicova. "Digital Proofing of Spot Color Printing", Proceedings of the 58th TAGA Annual Technical Conference, Vancouver, Canada, (2005).

Author Biographies

Yu-Ju Wu is a PhD student in the Department of Paper Engineering, Chemical Engineering, and Imaging at Western Michigan University. She received her Masters degree in Applied Media Arts at National Taiwan University of Arts, Taipei, Taiwan. Her research interests are color management, printability analysis, process control and experimental design.

Miro Suchy received his MS in Chemical Engineering and Pulp and Paper Technology from the Slovak Technical University (1994). After completing post-graduate training at McGill University (Montreal) he worked as Research Assistant at PAPRICAN/McGill University in Montreal, QC and as a Research Associate in Bio-products Division at IOGEN in Ottawa, ON. Currently he is studying at Western Michigan University.

Paul D. "Dan" Fleming is a professor in the Department of Paper Engineering, Chemical Engineering and Imaging at Western Michigan University. He has a Masters in Physics and a PhD in Chemical Physics from Harvard University. He has over 200 publications and presentations and 1 US patent.

Alexandra Pekarovicova, Ph.D., is an associate professor in the Department of Paper Engineering, Chemical Engineering and Imaging at Western Michigan University. She gained her Ph.D. in Chemical Engineering at Slovak Technical University. She published over 40 peer reviewed papers, and over 60 conference proceeding articles in, ink and substrate interactions, and print quality.